

007 Rec'd PCT/PTO 12 DEC 2007

FORM PTO-1390
(REV 10-94)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

9424.169USWO

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5)

Unknown 10/018232

INTERNATIONAL APPLICATION NO.

PCT/NL00/00428

INTERNATIONAL FILING DATE

June 20, 2000

PRIORITY DATE CLAIMED

June 21, 1999

TITLE OF INVENTION

DOSING DEVICE ADAPTED FOR DISPENSING A CONCENTRATE FROM A HOLDER IN A METERED MANNER

APPLICANT(S) FOR DO/EO/US

Paul Isordore D'HOND and Albertus Maria BRAMER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An unsigned oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND of SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information: PCT/IPEA/409; PCT/ISA/210; Marked-up Copy of Claims

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5)

INTERNATIONAL APPLICATION NO.

 JC13 Rec'd PGT/PTO 12 DEC 2001
 ATTORNEY'S DOCKET NUMBER

Unknown

PCT/NL00/00428

9424.169USWO

10/018232

17. [X] The following fees are submitted:

CALCULATIONS PTO USE ONLY

BASIC NATIONAL FEE (37 CFR 1.492(a) (1)-(5)):

Search Report has been prepared by the EPO or JPO.....\$890.00

International preliminary examination fee paid to USPTO
(37 CFR 1.492(a)(1)).....\$710.00No international preliminary examination fee paid to USPTO (37 CFR 1.482)
but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00Neither international preliminary examination fee (37 CFR 1.482) nor
international search fee (37 CFR 1.445(a)(3)) paid to USPTO \$1040.00International preliminary examination fee paid to USPTO (37 CFR 1.482)
and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00**ENTER APPROPRIATE BASIC FEE AMOUNT = \$890.00**Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	23 -20 = 3		X \$18.00
Independent claims	1 -3 = 0		X \$84.00

\$54.00

\$

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

+ \$260.00

\$

TOTAL OF ABOVE CALCULATIONS = \$944.00Reduction by 1/2 for filing by small entity, if applicable. Small entity status is claimed
pursuant to 37 CFR 1.27

\$

SUBTOTAL = \$944.00Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

+ \$

TOTAL NATIONAL FEE = \$944.00Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

+ \$

TOTAL FEES ENCLOSED = \$944.00Amount to be:
refunded

\$

charged

\$

a. [X] Check(s) in the amount of \$944.00 to cover the above fees is enclosed.

b. [] Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 13-2725.**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

John J. Gresens

MERCHANT & GOULD

P.O. Box 2903

Minneapolis, MN 55402-0903

SIGNATURE:

NAME: John J. Gresens

REGISTRATION NUMBER: 33,112

S/N unknown

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	D'HOND	Docket No.:	9424.169USWO
Serial No.:	unknown	Filed:	concurrent herewith
Int'l Appln No.:	PCT/NL00/00428	Int'l Filing Date:	June 20, 2000
Title:	DOSING DEVICE ADAPTED FOR DISPENSING A CONCENTRATE FROM A HOLDER IN A METERED MANNER		

CERTIFICATE UNDER 37 CFR 1.10

'Express Mail' mailing label number: EL 669945236 US

Date of Deposit: December 12, 2001

I hereby certify that this correspondence is being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

By: 

Name: Chris Stordahl

PRELIMINARY AMENDMENT

Box PCT
Assistant Commissioner for Patents
Washington, D. C. 20231

Dear Sir:

In connection with the above-identified application filed herewith, please enter the following preliminary amendment, which is based on the Article 34 amendments, based on claims amended in prosecution of the international application and published in the International Preliminary Examination Report, a copy of which is enclosed herewith:

IN THE ABSTRACT

Insert the attached Abstract page into the application as the last page thereof.

IN THE SPECIFICATION

A courtesy copy of the present specification is enclosed herewith. However, the World Intellectual Property Office (WIPO) copy should be relied upon if it is already in the U.S. Patent Office.

IN THE CLAIMS

Please amend claims 4-12, 15, 16, 19 and 21 to read as follows:

4. (AMENDED) A dosing device according to claim 1, characterized in that the rotor is provided with a magnetizable material such as soft iron.
5. (AMENDED) A dosing device according to claim 1, characterized in that the rotor comprises a permanent magnet for contactlessly driving the rotor by means of at least one magnetic field.
6. (AMENDED) A dosing device according to claim 1, characterized in that the rotor comprises a plurality of arms extending in radial direction of the rotation axis.
7. (AMENDED) A dosing device according to claim 5, characterized in that the ends of the arms form poles of the permanent magnet.
8. (AMENDED) A dosing device according to claim 1, characterized in that the pump is driven by the rotor by way of a drive shaft of which an axial axis is directed in a direction from the inlet to the outlet.
9. (AMENDED) A dosing device according to claim 1, characterized in that the housing of the dosing device is of substantially rotation-symmetrical design, with an axial axis of the housing extending in the direction from the inlet to the outlet.
10. (AMENDED) A dosing device according to claim 1, characterized in that the dosing device is provided, downstream of the pump, with a valve included in the liquid flow

path, which opens when the liquid pressure upstream of the valve exceeds a predetermined threshold valve.

11. (AMENDED) A dosing device according to claim 1, characterized in that the pump is constructed as a gear pump.

12. (AMENDED) A holder filled with concentrate, which in diluted form, is suitable for consumption, the holder comprises a dosing device according to claim 1.

15. (AMENDED) A holder according to claim 12, characterized in that the housing is of more rigid design than the bag.

16. (AMENDED) An apparatus for preparing a beverage suitable for consumption, the apparatus being adapted to be loaded with a holder according to claim 12 which is fitted with a dosing device for placement in a dispensing machine which comprises a magnetization unit for generating a changing magnetic field comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate is diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder, characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of the changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating rotor, the apparatus comprising a magnetization unit for generating at least one magnetic field changing such that the rotor is contactlessly driven by the magnetization unit for the dosing device to dispense

concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

19. (AMENDED) An assembly comprising an apparatus for preparing a beverage suitable for consumption and a holder according to claim 12, the apparatus being loaded with the holder, and the apparatus comprising driving means for driving the dosing device for the dosing device to dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

21. (AMENDED) An assembly according to claim 19, wherein the holder comprises a dosing device for placement in a dispensing machine which comprises a magnetization unit for generating a changing magnetic field comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate is diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder, characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of the changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating rotor, characterized in that the apparatus further comprises a magnetization unit for generating at least one magnetic field changing such that the rotor is driven for causing the dosing device to dispense concentrate from the holder.

REMARKS

The above preliminary amendment is made to remove multiple dependencies from claims 4-12, 15, 16, 19 and 21.

A new abstract page is supplied to conform to that appearing on the publication page of the WIPO application, but the new Abstract is typed on a separate page as required by U.S. practice.


Applicants respectfully request that the preliminary amendment described herein be entered into the record prior to calculation of the filing fee and prior to examination and consideration of the above-identified application.

If a telephone conference would be helpful in resolving any issues concerning this communication, please contact Applicants' primary attorney-of record, John J. Gresens (Reg. No. 33,112), at (612) 371.5265.

Respectfully submitted,

MERCHANT & GOULD P.C.
P.O. Box 2903
Minneapolis, Minnesota 55402-0903
(612) 332-5300

Dated: December 12, 2001

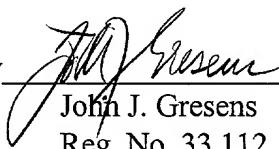By 
John J. Gresens
Reg. No. 33,112

JJG/pjk

ABSTRACT

The invention related to a dosing device comprising a housing comprising at least one inlet, at least one outlet. The dosing device is adapted for dispensing in a metered manner a viscous concentrate from a holder. The concentrate in diluted condition forms a beverage suitable for consumption. The dosing device is adapted to be connected, in use, to a storage space of the holder. According to the invention, the dosing device comprises a rotor connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of a changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotation rotor.

20250220 10:00:00

MARKED-UP COPY OF CLAIMS

4. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the rotor is provided with a magnetizable material such as soft iron.
5. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the rotor comprises a permanent magnet for contactlessly driving the rotor by means of at least one magnetic field.
6. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the rotor comprises a plurality of arms extending in radial direction of the rotation axis.
7. A dosing device according to claim[s] 5 [and 6], characterized in that the ends of the arms form poles of the permanent magnet.
8. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the pump is driven by the rotor by way of a drive shaft of which an axial axis is directed in a direction from the inlet to the outlet.
9. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the housing of the dosing device is of substantially rotation-symmetrical design, with an axial axis of the housing extending in the direction from the inlet to the outlet.
10. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the dosing device is provided, downstream of the pump, with a valve included in the liquid flow path, which opens when the liquid pressure upstream of the valve exceeds a predetermined threshold valve.

10018232

11. A dosing device according to [any one of the preceding claims] claim 1, characterized in that the pump is constructed as a gear pump.

12. A holder filled with concentrate, which in diluted form, is suitable for consumption, the holder comprises a dosing device according to [any one of the preceding claims] claim 1.

15. A holder according to [any one of] claim[s] 12[-14], characterized in that the housing is of more rigid design than the bag.

16. An apparatus for preparing a beverage suitable for consumption, the apparatus being adapted to be loaded with a holder according to [any one of the preceding] claim[s] 12[-15] which is fitted with a dosing device [according to any one of claims 1-11,] for placement in a dispensing machine which comprises a magnetization unit for generating a changing magnetic field comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate is diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder, characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of the changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating rotor, the apparatus comprising a magnetization unit for generating at least one magnetic field changing such

that the rotor is contactlessly driven by the magnetization unit for the dosing device to dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

19. An assembly comprising an apparatus for preparing a beverage suitable for consumption and a holder according to [any one of the preceding] claim[s] 12[-15], the apparatus being loaded with the holder, and the apparatus comprising driving means for driving the dosing device for the dosing device to dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

21. An assembly according to claim 19 [or 20], wherein the holder comprises a dosing device [according to any one of claims 1-11] for placement in a dispensing machine which comprises a magnetization unit for generating a changing magnetic field comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate is diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder, characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of the changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating rotor, characterized in that the apparatus further comprises a

[illegible]

Title: Dosing device adapted for dispensing a concentrate from a holder in a metered manner.

This invention relates to a dosing device comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate in diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder.

Such a device is known from British patent application 2103296. The dosing device described therein comprises a hollow cylinder-shaped body manufactured from a flexible elastic material. The body in question encloses a pumping volume. Further, the device comprises an operating element for compressing the body in an axial direction. The device also comprises a hollow cylinder-shaped housing which is adapted to encompass said body on its outer side at least during the phase in which the pumping volume is reduced. The flexible body is cyclically deformed in an axial direction, with the result that in each cycle a predetermined amount of extract is dispensed. To that end, the operating element is driven by means of a pulsating magnetic field. For driving the operating element, the dosing device is placed in a unit for generating a pulsating magnetic field. In a pulsating magnetic drive, the position of the dosing device with respect to the unit in axial direction of the dosing device is of great influence on the power to be supplied. This makes placing the dosing device in the unit very critical.

Further, the known dosing device has as a disadvantage that its action is dependent on the viscosity of the concentrate. A further disadvantage is that the dosing device is relatively expensive.

The object of the invention is to provide an improved dosing device.

5 To that end, the dosing device according to the invention is characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of a changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating
10 rotor.

As the dosing device comprises a rotor, it is no longer necessary, as in the known device, to utilize a pulsating drive. Because a pulsating drive can be omitted, the placement of the dosing device in a dispensing machine is no longer critical. A further advantage is that in the diluted form of the
15 concentrate, the so-called zebra effect does not arise because the concentrate is not dispensed in a pulsating manner.

Further, by virtue of the rotor, the dosing device can be of economically advantageous construction.

A further advantage of the device according to the invention is that
20 metering can be set steplessly. Moreover, the dosing device can be designed with small overall dimensions. Furthermore, the rotor can be arranged such that the rotation axis is directed approximately parallel to the direction of the liquid flow path. Such a construction is easy to realize.

According to a preferred embodiment, the rotor is included in the
25 liquid flow path. More particularly, the rotor is included in the liquid flow path upstream of the pump. In these cases, the rotor can also obtain the function of stirrer.

According to a preferred embodiment, the rotor is provided with a magnetizable material, such as soft iron. The rotor will then be magnetized
30 under the influence of the changing magnetic field and proceed to orient in

that magnetic field. Because the magnetic field changes, the rotor will start to rotate.

In particular, the rotor comprises a plurality of arms extending in radial direction of the rotation axis. In the magnetic field the ends of these arms will each time be magnetized to form a north or a south pole. For that matter, the rotor can also take other forms. Essential is only that the rotor comprises poles which are magnetized under the influence of the magnetic field to form a north and a south pole. Thus the rotor can also be in the form of, for instance, a bar, an oval, etc.

Preferably, the pump is driven by the rotor by way of a drive shaft of which an axial axis is directed in the direction from the inlet to the outlet. This may provide overall small dimensions to the dosing device. Moreover, the construction is very reliable. As a dynamic liquid sealing of the drive shaft can be omitted, there is relatively little energy loss and there is a very small chance of leakage or contamination. A further advantage is that the concentrate remaining behind in the dosing device after use is hermetically sealed from the outside world.

What is also achieved by virtue of the specific direction of the drive shaft is that the dosing device can be placed in a dispensing machine rotation-independently. The position of the rotor is not critical then. If the dosing device is connected to a holder filled with the concentrate, this connection can likewise be effected rotation-independently.

According to the preferred embodiment, the dosing device comprises a substantially rotation-symmetrical housing of which an axial axis extends in the direction from the inlet to the outlet. In particular, the dosing device is provided, downstream of the pump, with a valve included in the liquid flow path, which opens when the liquid pressure upstream of the valve exceeds a predetermined threshold value. The use of a pump in combination with a pressure relief valve has the advantage that no leakage flow owing to internal play arises in the non-driven condition. Moreover, the

valve provides for a microbiological sealing, which is important for beverages suitable for consumption.

Preferably, the pump is designed as a gear pump. Such a pump is very reliable and cheap and may provide a dosing device with small dimensions.

The holder according to the invention is characterized in that it is filled with the concentrate which in diluted condition is suitable for consumption, the holder being fitted with a dosing device according to the invention as described hereinbefore.

As the dosing device according to the invention, viewed in axial direction, can be made of low design, less length, viewed in this direction, is needed for driving than in the known linear magnet. This creates the possibility of making the dosing device extendible instead of foldable, so that a tearing strip in the holder, when it is designed as a so-called bag in box, can be omitted. This provides the advantage that making the box operational involves a simpler operation. In particular, accordingly, the holder is provided with a bag formed from flexible sheetlike material, in which the concentrate is contained, and a housing in which the bag is accommodated.

The invention also relates to an apparatus for preparing a beverage suitable for consumption, the apparatus being adapted to be charged with a holder as mentioned hereinbefore. The apparatus comprises a magnetization unit for generating at least one magnetic field which changes so as to drive the rotor to allow the dosing device to dispense concentrate from the holder in a metered manner. The apparatus further comprises means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption. The magnetization unit can be provided with a magnet and driving means for rotating a magnet for generating the changing magnetic field. It is also possible, however, that the magnetization unit is provided with a plurality of coils for generating the changing

magnetic field. The invention also relates to an assembly comprising an apparatus for preparing a beverage suitable for consumption and a holder as described hereinbefore. The apparatus is adapted to be loaded with the holder, the apparatus comprising driving means for driving the dosing
5 device to cause the dosing device to dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

The invention will presently be further explained with reference to the drawings, in which:

10 Fig. 1 shows an exploded view of a possible embodiment of a dosing device according to the invention, which is connected to a holder according to the invention. Fig. 1 also shows a magnetization unit of an apparatus for preparing a beverage suitable for consumption;

Fig. 2 shows a number of parts of the dosing device according to

15 Fig. 1;

Fig. 3 shows a number of parts of the dosing device and the apparatus for preparing a beverage suitable for consumption according to Fig. 1;

20 Fig. 4a shows a top plan view of the gear pump of the dosing device according to Fig. 1;

Fig. 4b shows a cross section of the dosing device according to Fig. 1 which is placed in the magnetization unit of Fig. 1;

Fig. 5a shows a top plan view of the dosing device according to Fig. 1 which is placed in the magnetization unit according to Fig. 1;

25 Fig. 5b shows a view of the dosing device according to Fig. 1 which is placed in the magnetization unit according to Fig. 1; and

Fig. 6 shows a holder with a dosing device according to the invention, an apparatus for preparing a beverage suitable for consumption according to the invention, and an assembly comprising the apparatus and
30 the holder according to the invention.

In Figs. 1-6, reference numeral 1 indicates a dosing device according to the invention. The dosing device comprises an inlet 2 and at least one outlet 4.

The liquid flow path extends from the inlet 2 to the outlet 4. In this example, the dosing device comprises a housing 6a and 6b composed of two parts, which is rotation-symmetrical around an axis which is directed in the direction of the liquid flow path.

In the housing 6a, 6b, a pump 8 is included. The pump 8 is here designed as a gear pump. At the top, the gear pump 8 comprises a covering plate 10 having an inflow opening 12. The inflow opening 12 is in fluid communication with a space where the teeth of, in this case two, gearwheels 14a and 14b mesh. The gearwheel 14b is driven by a drive shaft 16 which in mounted condition extends through an opening 18 of the covering plate 10. The gear pump 8 is provided at its underside with an outflow opening 20 for dispensing liquid. The drive shaft 16 is so directed that an axial axis of this drive shaft is directed in the direction from the inlet 2 to the outlet 4. In this example, the housing 6a, 6b is designed to be substantially rotation-symmetrical around the axial axis, likewise extending in the direction from the inlet 2 to the outlet 4.

In this example, the dosing device is provided, upstream of the gear pump 8, with a rotor 22 connected mechanically with the gear pump, in this example connected mechanically with the rotary shaft 16. In mounted condition, this rotor 22 is disposed above the covering plate 10. The rotor is adapted to be driven by means of a changing magnetic field, for the purpose of driving the gear pump 8.

In this example it holds, further, that the rotor 22 is included in the liquid flow path mentioned. In this example, the rotor is provided with a permanent magnet for contactlessly driving the rotor by means of at least one magnetic field. In particular it holds, in this example, that the rotor comprises a plurality of arms 24 extending in radial direction of the rotation

axis (drive shaft 16). More particularly, there are only two arms, disposed in line with each other and hence forming a beamlike body. The ends of the arms form poles of the permanent magnet mentioned. The poles of the permanent magnet will want to follow the changing magnetic field, which
5 has as a result that the rotor and the drive shaft 16 will start to rotate. The device described up to this point works as follows. Suppose that the inlet 2 of the dosing device is connected to a holder 26, shown schematically in Figs. 1 and 6, in which an amount of concentrate, such as, for instance, coffee concentrate, is present. The holder 26, as shown best in Fig. 6, is
10 fitted with the dosing device according to Fig. 1. In this example, the holder 26 includes a bag 28 (indicated by broken lines), formed by a flexible sheetlike material, in which the concentrate is contained, and a housing 30 in which the bag 28 is accommodated. The housing 30 is preferably made of substantially rigid design and hence is more rigid than the bag 28. The inlet
15 2 of the dosing device is in fluid communication with the inside of the bag 28. By presently generating a magnetic field changing in a predetermined manner, the rotor 22 will start to rotate in a predetermined manner. As a consequence, the gear pump 8 will likewise start to rotate, with the result that concentrate flows via the inflow opening 12 and the space between the
20 teeth of the gearwheels to the outflow opening 20 mentioned. Thus the amount of concentrate dispensed in a metered manner corresponds with the angle of rotation through which the rotor 22 is rotated. The relation is substantially linear.

In Fig. 6, reference numeral 31 designates an apparatus for
25 preparing a beverage suitable for consumption. The apparatus 31 is adapted to be loaded with the holder 26. The apparatus 31 comprises a magnetization unit 32 for generating the changing magnetic field referred to for driving the rotor. Further, the apparatus comprises means 34 for diluting the concentrate dispensed by the dosing device 1 with water. These
30 means 34 comprise a hot water generator 36 and a mixing unit 38. In use,

the housing 6a, 6b of the dosing device is inserted through an opening 40 of the magnetization device, such that the outlet 4 of the dosing device reaches into an opening 42 of the mixing device 38. A control unit 44 of the apparatus 31 controls the magnetization unit 32 via line 45, such that a changing magnetic field is generated which causes the rotor 22 to rotate through a predetermined angle of rotation. As a result, from the holder 26 a predetermined amount of concentrate is dispensed to the mixing device 38. The control unit 44 also activates the hot water unit 36 and the mixing unit 38 via respective electrical lines 46 and 48. As a result, hot water is sent from the hot water unit 36 to the mixing unit 38. In the mixing unit, the hot water is mixed with the dispensed concentrate, after which the concentrate, in diluted condition and hence in the condition of a beverage suitable for consumption, leaves an outlet opening 50 of the apparatus 31.

In this example, the magnetization unit 32 comprises a plurality of coils 52 for generating the changing magnetic field.

The invention is not limited in any way to the embodiments outlined hereinabove. Thus, the rotor 22 may also be provided exclusively with soft iron. Magnetization of the rotor is then effected by the magnetic field of the magnetization unit 31. The rotor will want to orient in this changing magnetic field, so that the rotation is effected. The rotor 22 may also be driven, in a manner known per se, as is known for an eddy current motor. Upon rotation of the rotor, fly-back pulses arise in the coils 52 of the magnetization device which are not energized.

It is also possible that the coils 52 are replaced by permanent magnets, these magnets being mechanically rotated for generating the changing magnetic field.

Further, in the outflow opening 20 referred to, a valve 54 may be included which opens when the liquid pressure upstream of the valve exceeds a predetermined threshold value. This involves a so-called non-return valve comprising a shut-off member 56 with a spring 58 which is

schematically shown in this example . The valve 54 can also be designed as a so-called step valve.

In this example, the housing 6a and 6b is made of a suitable plastic. The gearwheels 14a and 14b and the drive shaft 16 are also made of plastic. The only metal part is therefore the rotor 22. It is also possible that the rotor is included in the liquid flow path downstream of the gear pump. Such variants are all understood to fall within the scope of the invention.

[illegible]

CLAIMS

1. A dosing device comprising a housing comprising at least one inlet, at least one outlet, a liquid flow path extending from the inlet to the outlet, and a pump included in the liquid flow path, the dosing device being adapted for dispensing in a metered manner a viscous concentrate from a holder in which the concentrate is contained, the concentrate in diluted form giving a product suitable for consumption, the holder comprising a storage space in which the concentrate is contained, and the inlet of the dosing device being adapted to be connected, in use, to the storage space of the holder, characterized in that the dosing device comprises a rotor rotatably connected to the housing for rotation around a rotation axis, for causing the rotor to rotate about the rotation axis by means of a changing magnetic field, the rotor being mechanically connected to the pump for driving the pump with the rotating rotor.
2. A dosing device according to claim 1, characterized in that the rotor is included in the liquid flow path.
3. A dosing device according to claim 2, characterized in that the rotor is included in the liquid flow path upstream of the pump.
4. A dosing device according to any one of the preceding claims, characterized in that the rotor is provided with a magnetizable material such as soft iron.
5. A dosing device according to any one of the preceding claims, characterized in that the rotor comprises a permanent magnet for contactlessly driving the rotor by means of at least one magnetic field.
6. A dosing device according to any one of the preceding claims, characterized in that the rotor comprises a plurality of arms extending in radial direction of the rotation axis.
7. A dosing device according to claims 5 and 6, characterized in that the ends of the arms form poles of the permanent magnet.

8. A dosing device according to any one of the preceding claims, characterized in that the pump is driven by the rotor by way of a drive shaft of which an axial axis is directed in a direction from the inlet to the outlet .

9. A dosing device according to any one of the preceding claims, characterized in that the housing of the dosing device is of substantially rotation-symmetrical design, with an axial axis of the housing extending in the direction from the inlet to the outlet.

10. A dosing device according to any one of the preceding claims, characterized in that the dosing device is provided, downstream of the pump, with a valve included in the liquid flow path, which opens when the liquid pressure upstream of the valve exceeds a predetermined threshold value.

11. A dosing device according to any one of the preceding claims, characterized in that the pump is constructed as a gear pump.

12. A holder filled with concentrate which in diluted form is suitable for consumption, the holder comprising a dosing device according to any one of the preceding claims.

13. A holder according to claim 12, characterized in that the holder comprises a bag formed from a flexible sheetlike material in which the concentrate is contained, and a housing in which the bag is received.

14. A holder according to claim 13, characterized in that the inlet of the dosing device is connected to the bag.

15. A holder according to any one of claims 12-14, characterized in that the housing is of more rigid design than the bag.

16. An apparatus for preparing a beverage suitable for consumption, the apparatus being adapted to be loaded with a holder according to any one of the preceding claims 12-15 which is fitted with a dosing device according to any one of claims 1-11, the apparatus comprising a magnetization unit for generating at least one magnetic field changing such that the rotor is contactlessly driven by the magnetization unit for the dosing device to

dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

17. An apparatus according to claim 16, characterized in that the magnetization unit comprises a magnet and driving means for rotating the magnet for generating the changing magnetic field.

18. An apparatus according to claim 16, characterized in that the magnetization unit comprises a plurality of coils.

19. An assembly comprising an apparatus for preparing a beverage suitable for consumption and a holder according to any one of the preceding claims 12-15, the apparatus being loaded with the holder, and the apparatus comprising driving means for driving the dosing device for the dosing device to dispense concentrate from the holder in a metered manner, and means for diluting the dispensed concentrate with water for obtaining the beverage suitable for consumption.

20. An assembly according to claim 19, characterized in that the holder is detachably connected to the apparatus.

21. An assembly according to claim 19 or 20, wherein the holder comprises a dosing device according to any one of claims 1-11, characterized in that the apparatus further comprises a magnetization unit for generating at least one magnetic field changing such that the rotor is driven for causing the dosing device to dispense concentrate from the holder.

22. An assembly according to claim 21, characterized in that the magnetization unit comprises a magnet and driving means for rotating the magnet for generating the changing magnetic field.

23. An assembly according to claim 21, characterized in that the magnetization unit comprises a plurality of coils.

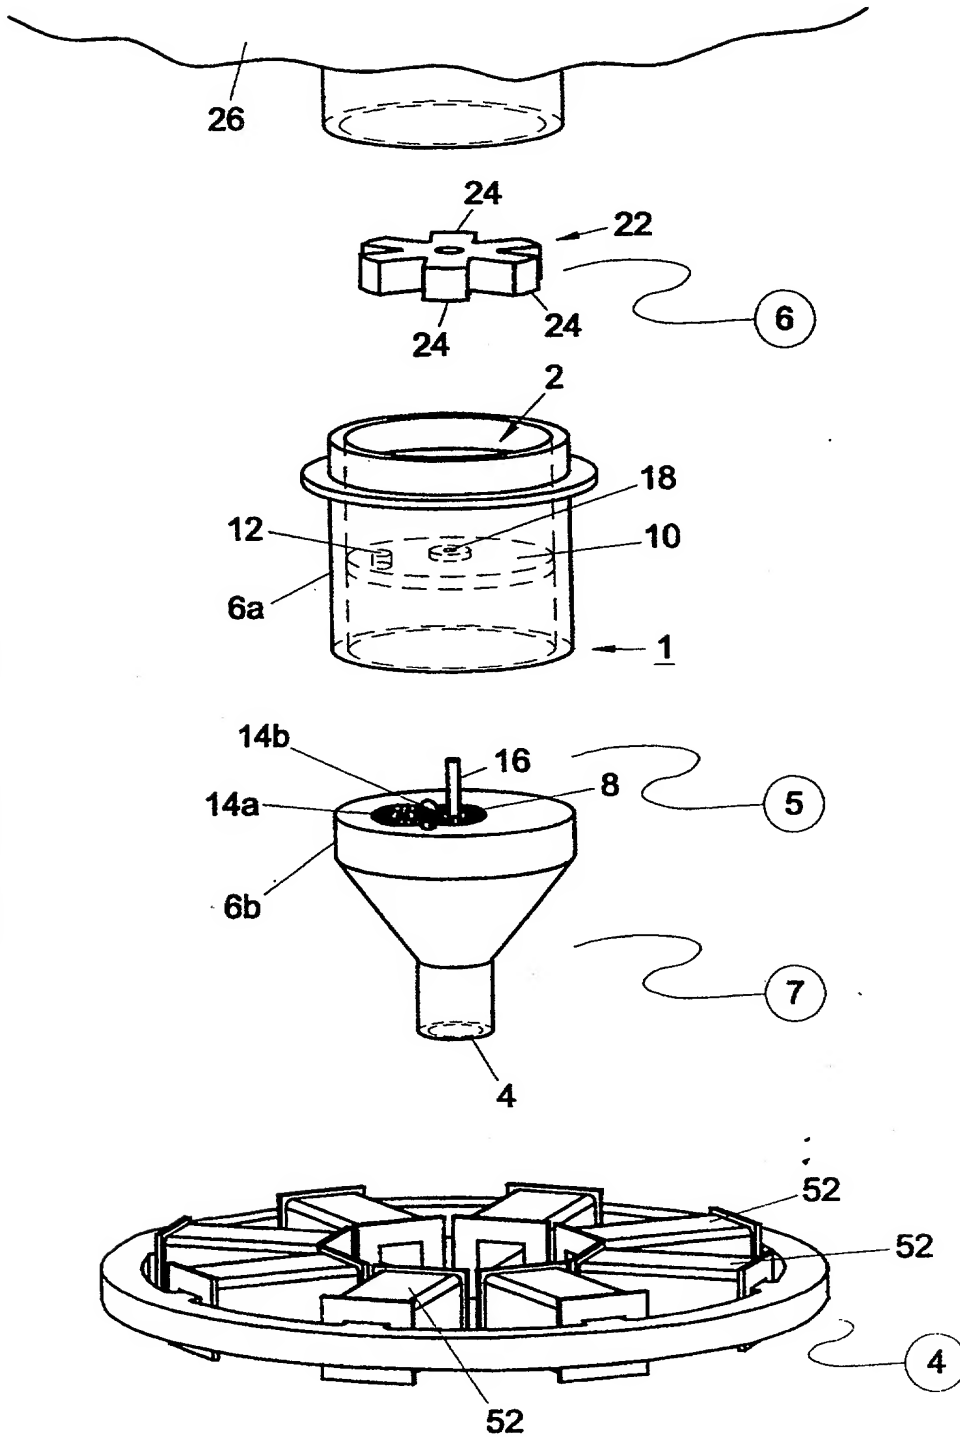


Fig. 1

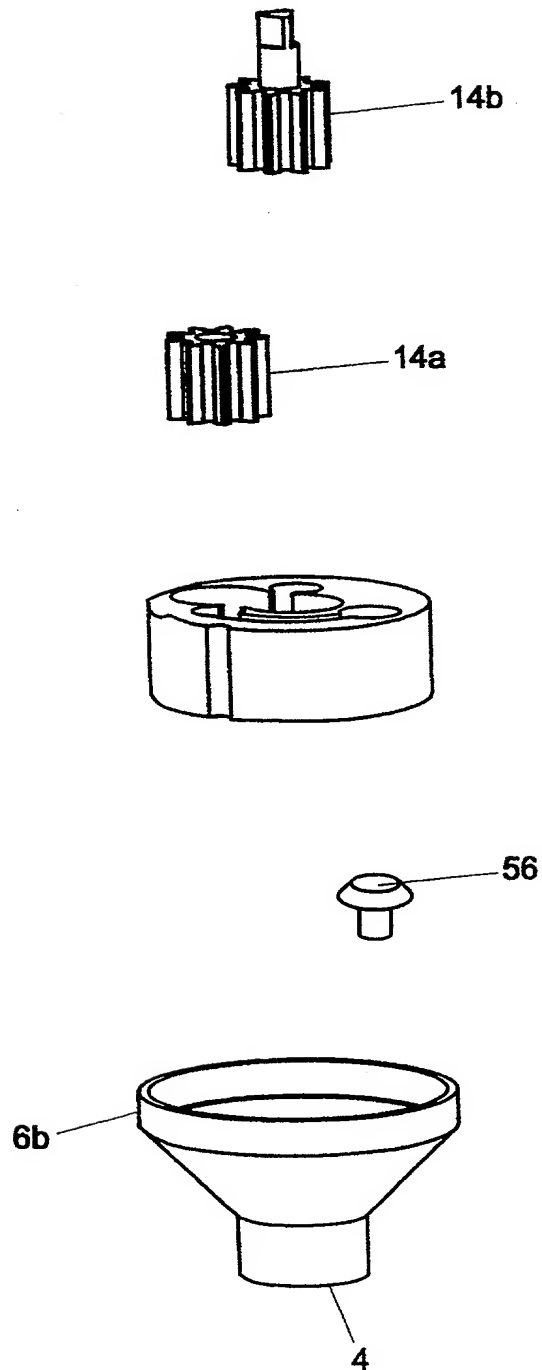


Fig. 2

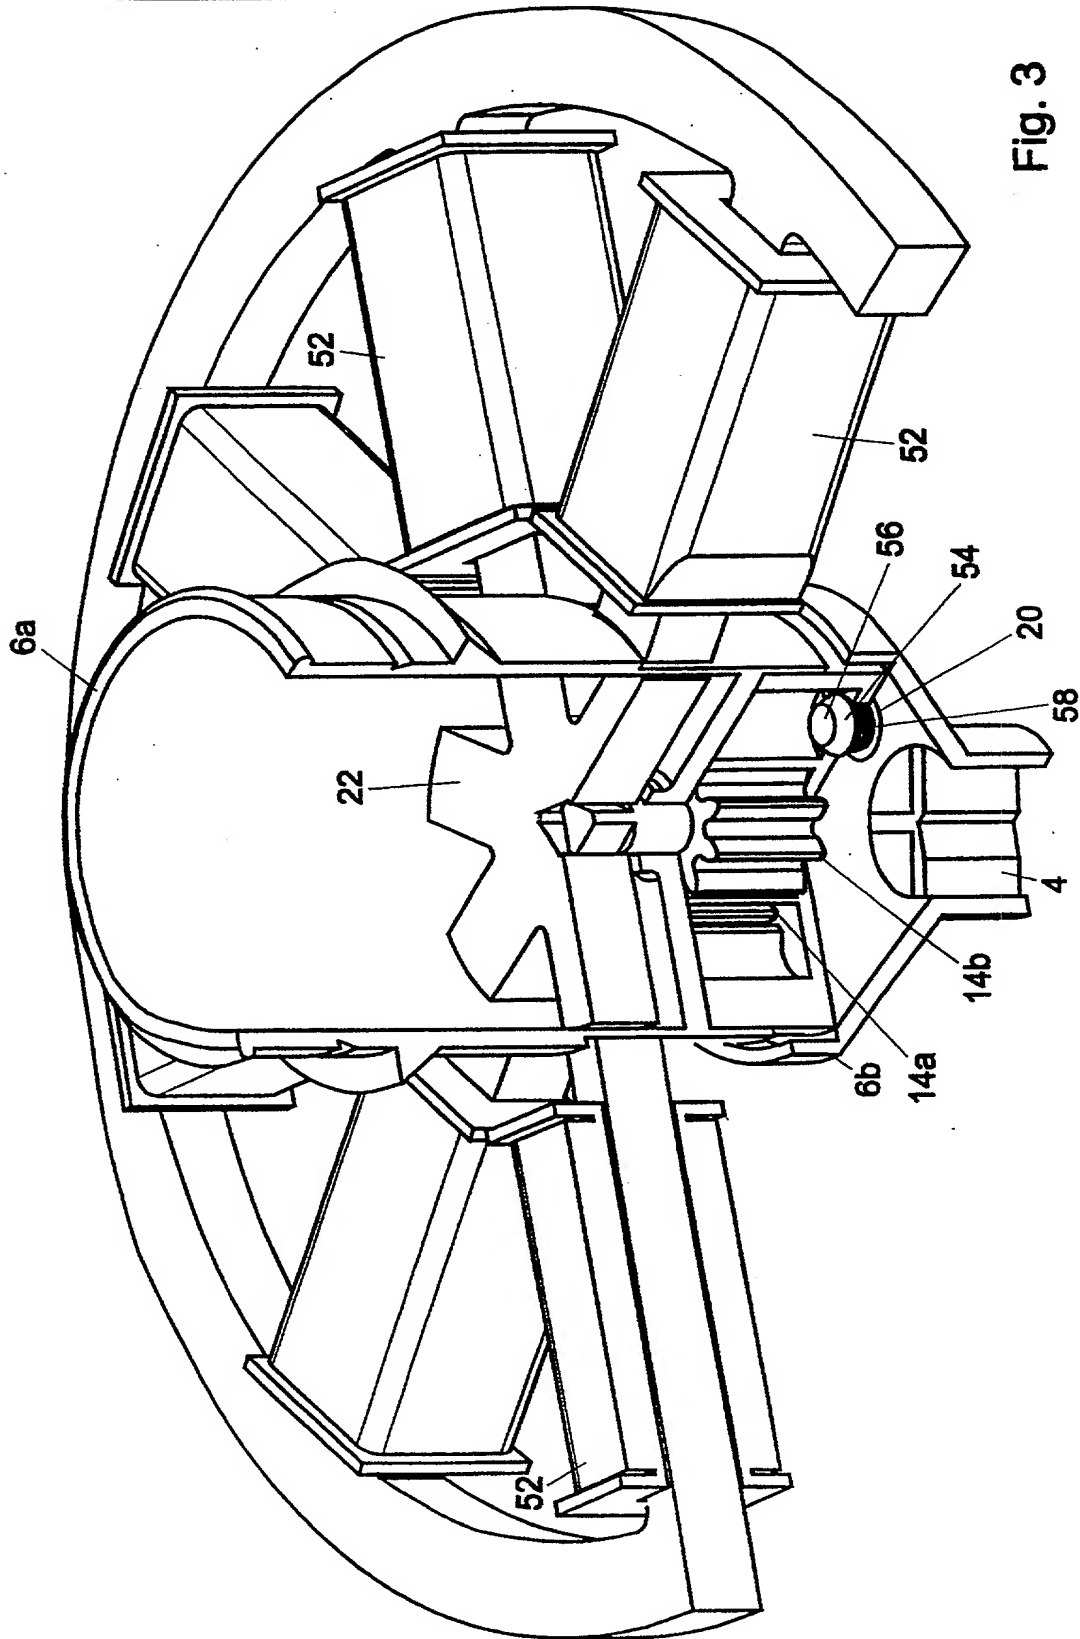


Fig. 3

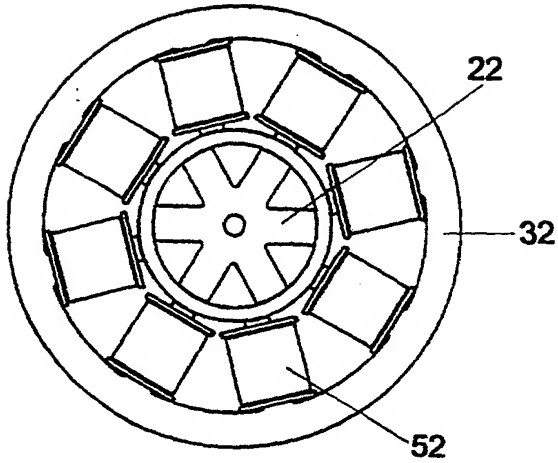


Fig. 5a

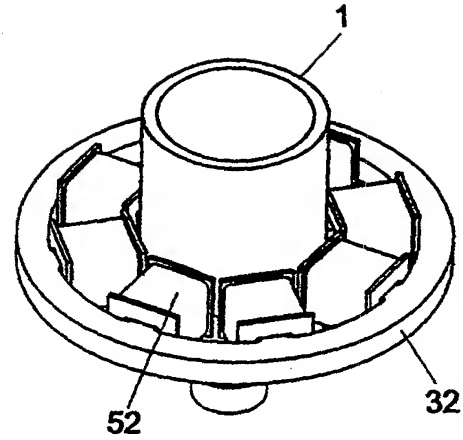


Fig. 5b




Fig. 4a

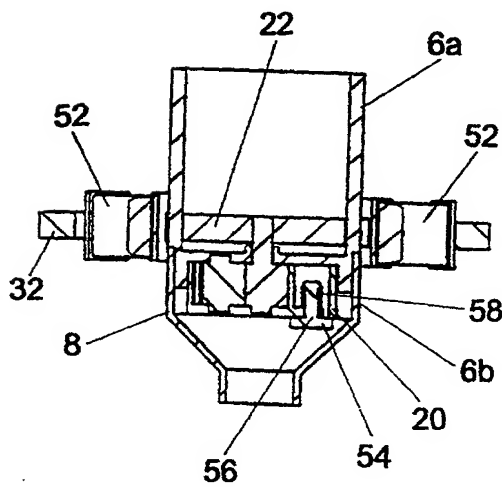


Fig. 4b

209220 22287001

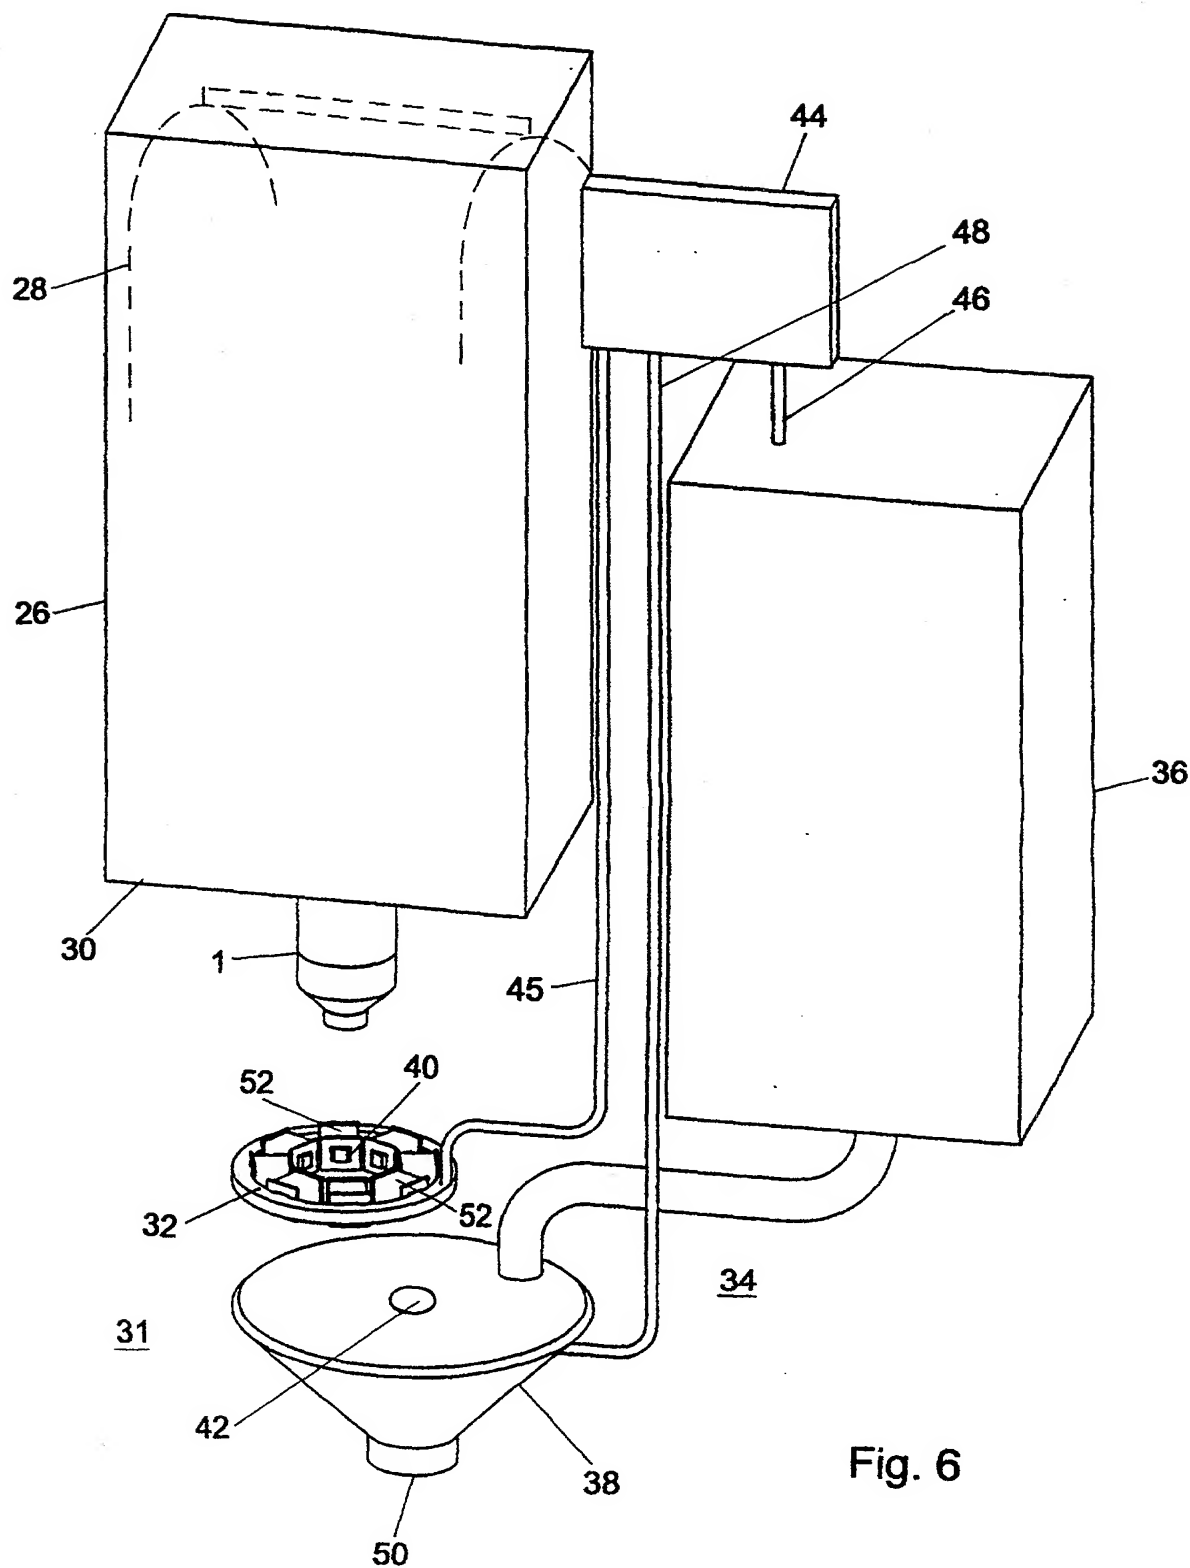


Fig. 6



**Declaration and Power of Attorney Patent Application
(Design or Utility)**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: "Dosing device adapted for dispensing a concentrate from a holder in a metered manner".

the specification of which

- ☐ is attached hereto
☒ was filed on December 12, 2001 as application serial no. 10/018,232

and or PCT International Application number PCT/NL00/00428 and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information know to me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or 35 U.S.C. §365(b) of any foreign application(s) for patent or inventor's certificate, or 35 U.S.C. §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate of PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)		
Number 1012395	Country NL	Day/Month/Year Filed 21 June 1999
Number 1013392	Country NL	Day/Month/Year Filed 26 October 1999
Number 1013393	Country NL	Day/Month/Year Filed 26 October 1999

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)	
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date
Serial Number	Day/Month/Year Filing Date

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or under 35 U.S.C. §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:


Prior U.S. or International Application(s)		
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)
Serial Number	Day/Month/Year Filed	Status (patented, pending, abandoned)


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instructed otherwise.

Please direct all correspondence in this case to at the address indicated below:

~~MERCHANT & GOULD P.C.~~
~~P.O. Box 2903~~
~~Minneapolis, Minnesota 55402-0903~~
~~United States of America~~

Full Name of Sole or First Inventor		
Family Name <u>d'Hond</u>	First Given Name <u>Paul</u>	Second Given Name <u>Isodore</u>
Residence and Citizenship		
City of Residence <u>Zwijndrecht</u>	State or Country of Residence <u>the Netherlands</u>	Country of Citizenship <u>the Netherlands</u>
Post Office Address		
Street Address <u>Berlijnseplein 47</u>	City <u>Zwijndrecht</u>	State & Zip Code or Country <u>3332 SB</u>
Signature of Inventor 		Date <u>31-01-2002</u>

Full Name of Second Inventor, if any		
Family Name <u>Bramer</u>	First Given Name <u>Albertus</u>	Second Given Name <u>Maria</u>
Residence and Citizenship		
City of Residence <u>Culemborg</u>	State or Country of Residence <u>the Netherlands</u>	Country of Citizenship <u>the Netherlands</u>
Post Office Address		
Street Address <u>Bikolaan 63</u>	City <u>Culemborg</u>	State & Zip Code or Country <u>4105 HB</u>
Signature of Inventor 		Date <u>30-1-2002</u>

Power of Attorney

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Attorney	Registration Number
John W. Albrecht	40,481
M. Jeffer Ali	46,359
Gregg I. Anderson	28,828
Brian H. Batzli	32,960
John L. Beard	27,612
John M. Berns	43,496
Bruce E. Black	41,622
John W. Branch	41,633
Dennis C. Bremer	40,528
Steven C. Bruess	34,130
Linda M. Byrne	32,404
Keith Campbell	P-46,597
Alan G. Carlson	25,959
Philip P. Caspers	33,227
James R. Chiapetta	39,634
John A. Clifford	30,247
Richard J. Coldren	44,084
Ronald A. Daignault	25,968
Dennis R. Daley	34,994
Leslie E. Dalglish	40,579
Juie R. Daulton	36,414
Katherine M. DeVries Smith	42,157
Mark J. DiPietro	28,707
Robert T. Edell	20,187
Sandra Epp Ryan	39,667
Robert J. Glance	40,620
Matthew J. Goggin	44,125
Charles E. Golla	26,896
Alan G. Gorman	38,472
John D. Gould	18,223
Richard Gregson	41,084
John J. Gresens	33,112
Samuel A. Hamer	46,754
Curtis B. Hamre	29,165
Kevin C. Harrison	P-46,759
Brett A. Hertzberg	42,660
Randall A. Hillson	31,838
Richard J. Holzer, Jr.	42,668
Scott W. Johnston	39,721
Natalie D. Kadievitch	34,196
Shaukat Karjeker	34,049
Joseph M. Kastelic	37,160
Denise Kettelberger	33,924
Jeramie J. Keys	42,724
Homer L. Knearl	21,197
Alan W. Kowalchyk	31,535

20090303 "POWER OF ATTORNEY"

209220" 2222T00T

Katherine M. Kowalchyk	36,848
Paul E. Lacy	38,946
James A. Larson	40,443
Andrew J. Leon	46,869
Christopher J. Leonard	41,940
Mara E. Liepa	40,066
Timothy A. Lindquist	40,701
Lawrence E. Lycke	38,540
Denise L. Mayfield	33,732
Daniel W. McDonald	32,044
William F. McIntyre, Jr.	44,921
M. Todd Mitchem	40,731
Douglas P. Mueller	30,300
A. Shane Nichols	43,836
Daniel M. Pauly	40,123
Bryan K. Phillips	P-46,990
John B. Phillips	37,296
Paul Prendergast	46,068
Melissa J. Pytel	41,512
Terry Qualey	25,148
John C. Reich	37,703
Earl D. Reiland	25,767
Lisa A. Samuels	43,080
David G. Schmaltz	39,828
Mark D. Schuman	31,197
Micheal D. Schumann	30,422
Timothy B. Scull	42,137
Gregory A. Sebald	33,280
Mark T. Skoog	40,178
Steven J. Spellman	45,124
Kirstin L. Stoll-DeBell	43,164
John P. Sumner	29,114
Erik G. Swenson	45,147
David K. Tellekson	32,314
Jon R. Trembath	38,344
Ido Tuchman	45,924
Marcia A. Tunheim	42,189
Albert L. Underhill	27,403
J. Derek Vandenburg	32,179
John R. Wahl	33,044
Karrie G. Weaver	43,245
Paul A. Welter	20,890
Brian Whipps	43,261
John E. Whitaker	42,222
J. Scott Wickhem	41,376
Douglas J. Williams	27,054
James D. Withers	40,376
Jonelle Witt	41,980
Tong Wu	43,361
Min S. Xu	39,536
Anthony R. Zeuli	45,255

I hereby authorize them or others whom they may appoint to act and rely on instructions from and communicate directly with the person/organization who/which first sends this